PREMIER®

MANUAL DE INSTRUCCIONES
BATERÍA DE RESPALDO PARA CELULARES
AC-4134CEL

ESTIMADO CLIENTE
Con el fin de que obtenga el mayor desempeño de su producto, por favor lea este manual de instrucciones cuidadosamente antes de comenzar a utilizarlo, y guárdelo para su futura referencia.
Si necesita soporte adicional, no dude en escribir a: ***info@premiermundo.com***

PRECAUCIÓN

RIESGO DE CHOQUE ELÉCTRICO , NO ABRA

Precaución: Para reducir el riesgo de choque eléctrico, no retire la cubierta, no hay partes manipulables por el usuario al interior de la unidad. Refiera todo mantenimiento o intervención técnica a personal técnico calificado.

Este símbolo indica la existencia de voltaje peligroso al interior de esta unidad que constituye un riesgo de choque eléctrico.

Este símbolo indica que hay importantes instrucciones de operación y mantenimiento en la literatura que acompaña a esta unidad.

LÍNEAS DE SERVICIO AL CLIENTE PREMIER

Venezuela:	0800 – ELECTRIC (353-2874)
Colombia:	01-900-331-PEJC (7352)
Panamá:	300-5185
Sitio Web:	www.premiermundo.com
E-mail:	servicioalcliente@premiermundo.com

NOTA
Nos reservamos el derecho de modificar las especificaciones, características y/u operación de esta unidad sin previo aviso, con el fin de continuar las mejoras y desarrollo del mismo.

INTRODUCCIÓN

Esta unidad es un dispositivo de alto rendimiento, portátil especial para suministrar carga a teléfonos móviles en cualquier lugar y en cualquier momento.
Especial para personas de negocios, amantes de la música y los juegos, para llamadas de emergencias, etc, ya que con esta unidad usted siempre contara con una batería de respaldo para su teléfono móvil.

CARACTERÍSTICAS

- Cubierta con diseño IML
- Diseño compacto y estilizado
- Diseño de encendido y apagado automático para un ahorro máximo de energía.
- Indicadores LED de entrada y salida de potencia de dos colores.
- Luz flash de alta eficiencia
- Botón de operación, cinco indicadores LED para capacidad de batería.
- Protección de sobre carga y descarga

PARÁMETROS TÉCNICOS

- Tipo de batería: polímero-litio
- Peso: 65g
- Capacidad de la batería: 2000mAh
- Voltaje de entrada: DC 5.0V
- Corriente de entrada: 800mA
- Voltaje de salida: DC 5.0V
- Corriente de salida: 750mA
- Tiempo de carga: 3-4h
- Dimensiones: 80 x 33 x 17.8mm

FUNCIONALIDADES

1. Interfaz de entrada USB mini estándar.
- Interfaz de entrada DC, voltaje 5.0V, conector de adaptador compatible con computadores.
2. Interfaz de salida USB estándar
3. Indicador LED de potencia
- Indicadores de potencia azul

10%-30% de potencia, Indicador LED (a)
30%-50% de potencia, indicador LED (a-b)
50%-70% de potencia, Indicador LED (a-b-c)
70%-90% de potencia, Indicador LED (a-b-c-d)
90%-100% de potencia, Indicador LED (a-b-c-d-e)
cuando la carga de la batería es menor a 10%, los indicadores LED (a-b-c-d-e) no se encienden.

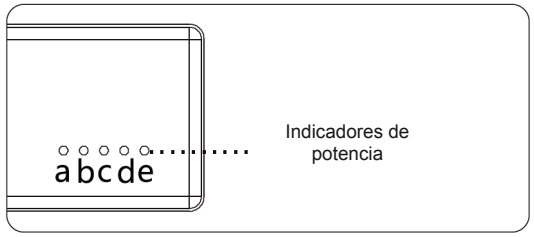

4. Indicador LED de descarga
Indicador LED azul: El teléfono esta siendo cargado
5. Indicador LED de carga:
Indicador brilla regularmente: si la unidad esta siendo cargada los cinco indicadores LED (a-b-c-d-e) se tornan azules: el teléfono esta cargado completamente.

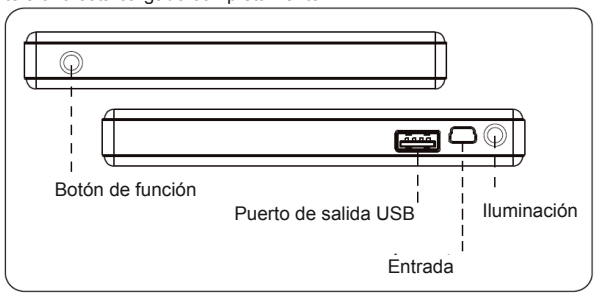

6. Botón
- Encender: presione el botón por 2 segundos.
  Desbloquear: los 5 LEDs brillan. Cuando se detienen de parpadear muestra la potencia actual. Inicia la carga.
- Presione una vez: el indicador LED se apaga. Se detiene la carga, al mismo tiempo, la luz se enciende.
- Presione dos veces y la luz se apaga
- Apagar: presione el botón por 2 ó 3 segundos. Los indicadores LED se apagan

Tips: si no va a usar la unidad, bloquéela presionando el botón por 2 – 3 segundos, con el fin de ahorrar energía.

USO DE LA UNIDAD POR PRIMERA VEZ

Cargar completamente la batería de la unidad:
- Método 1: retire el cable retráctil, conecte el USB mini de la caja con el puerto de salida del cable retráctil.

- Conecte el USB mini a la entrada de la unidad y conecte el otro extremo al puerto de entrada USD del computador.

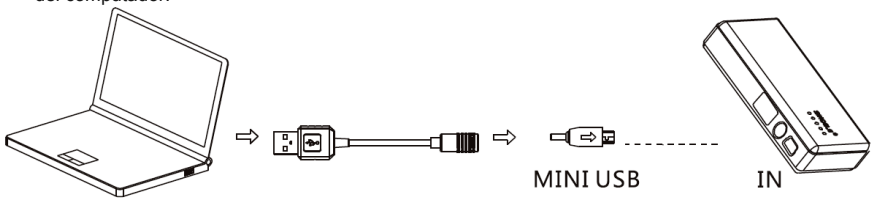

Método 2:

- El indicador LED azul brilla regularmente indicando que se ha iniciado la carga. Al mismo tiempo el indicador LED muestra la cantidad de electricidad.
- Retire el cable retráctil, conecte la USB mini al puerto de salida del cable retráctil.
- Conecte la USB mini al conector de entrada del dispositivo que desea cargar y luego conecte la unidad al tomacorriente.
- Refiérase a la siguiente imagen:

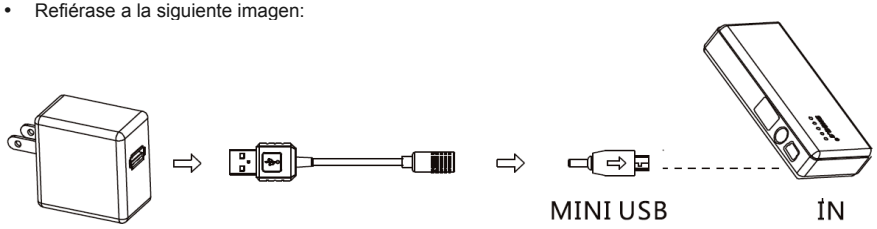

- El indicador LED azul brilla regularmente indicando que se ha iniciado la carga. Al mismo tiempo el indicador LED muestra la cantidad de electricidad.

COMO CARGAR EL TELÉFONO MÓVIL

- Conecte la salida del puerto de carga del cable de la unidad al puerto de entrada de carga de su teléfono móvil.
- Mantenga estable la unidad cuando cargue el teléfono móvil y asegúrese de conectar la unidad al teléfono móvil de manera adecuada, con el fin de evitar un débil contacto.

CERTIFICACIÓN

CE RoHS

MANTENIMIENTO

- Mantenga la unidad en un lugar seco. La humedad puede afectar seriamente sus dispositivos internos.
- No almacene ni exponga la unidad a fuentes de calor, ya que se puede acortar su vida útil o derretirse algunas partes plásticas.
- Evite que la unidad se golpee fuertemente, así mismo evite agitarla.
- No intente abrir o modificar la unidad usted mismo.

PREMIER®

INSTRUCTION MANUAL
POWER BANK 2000
AC-4134CEL

DEAR CUSTOMER

In order to achieve the best performance of your product, please read this instruction manual carefully before using, and keep it for future reference.
If you need extra support, please write to ***info@premiermundo.com***

CAUTION

RISK OF ELECTRIC SHOCK, DO NOT OPEN

Caution: To reduce the risk of electric shock do not open this device, there are not serviceable parts for costumers. Please refer any maintenance or repair to qualified personnel.

This sign means the existence of dangerous voltage at the inside of the unit, which states a risk of electric shock.

This sign means that there are important instructions of operation and handling in the manual that comes with this device.

PREMIER CUSTOMER SERVICE

Venezuela:	0800 – ELECTRIC (353-2874)
Colombia:	01-900-331-PEJC (7352)
Panama:	300-5185
Website	www.premiermundo.com
E-mail:	servicioalcliente@premiermundo.com

NOTE
This unit may be submitted to changes in specifications, characteristics and/or operation without prior notice to the user, in order to continue improving and developing its technology.

Use Preface

Thank you for purchasing our products B-2000 of Power Bank series, welcome to use it. The functions of mobile phones and various digital products are increasingly powerful, following which are the troubles of no-electricity aroused by quick power consumption. At this historic moment, Power Bank is developed, electricity storing and easily carrying. No matter you are in public, on business trip or in journey, Power Bank can help you remove battery problems provide that you charge it fully ahead. Farewell the missing calling aroused by no-power; Farewell interrupted games aroused by no-power; Farewell stopped shooting aroused by no-power; Farewell all these troubles aroused by no-power. Power Bank is your best choice.

Introduction

Power Bank B-2000 is a delicate and superior workmanship power storage. So long as your digital products have a USB cable, all those can be charged by Power Bank. Its compact appearance and easily carrying make it become a necessary item to take. It is the best thing to meet emergency for traveling enthusiasts, music lover, businessman and the game lovers.

Features

*Covering utilize IML craft.
*Compact and stylish design.
*Startup and closedown function design cut to self energy consuming a minimum.
*Two-color LED indicates power input and output.
*High energy-efficient flashlight.
*Button operation, five LED indicate battery capacity.
*Two level voltages input and output are recognized automatically.
*Charging and discharging overload protection.

Technical Parameters

Battery type: Lithium polymer
Weight:65g
Battery capacity: 2000mAh
Input voltage: DC 5.0V
Input current: 800mA
Output voltage: DC 5.0V
Output current: 750mA
Charging time:3-4h
Dimension: 80*33*17.8mm

Function Key

1.Standard mini USB input interface.
DC input interface, voltage 5.0V, connect compatible adapter with computer
2.Standard USB output interface
3.LED power indicator
The Indictors shine blue:
Power 10%-30%, a LED shines
Power 30%-50%, a-b LED shine
Power 50%-70%, a-b-c LED shine
Power 70%-90%, a-b-c-d LED shine
Power 90%- 100%, a-b-c-d-e LED shine
Power less than 10%, the a-b-c-d-e LED lights extinguish.

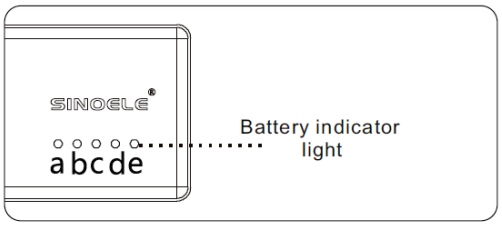

4.Discharging LED indicator
LED light turns blue: Phone is being charged
5.Charging LED indicator
LED shines regularly: Power Bank is being charged
Abcde five LED lights turn blue: Phone is fully charged.

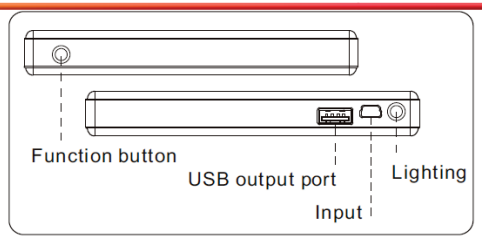

6.Button
1.Turn on: Press the button for 2 seconds. Unclock. 5 LED shines from left to right. Stop flicking shows the current power. Start Charging.
2.Press 1st time: LED goes out. Stop charging. At the same time, Light turns on.
3.Press 2nd time: Light turns off.
4.Turn off: Press the button for 2-3 seconds. 5 LED lights extinguish after shining from left to right.

Tips: If you don`t use Power Bank, Please lock it through pressing the button for 2-3 seconds in order to keep its power.

Quick user manual

Use and charge for the first time
1.Charge Power Bank first until it is fully charged
Method 1: Take out retractable cable, connect Mini USB taken from box with retractable cable output port.
connect Mini USB with input socket of the product, connect another end of USB with input port of computer USB.

As follows:

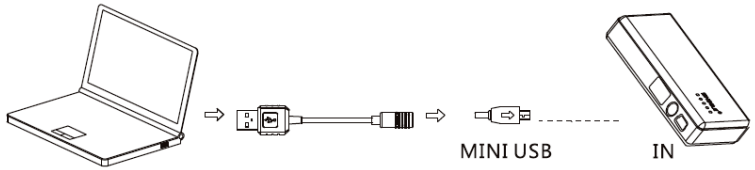

Method 2: *Blue LED shines regularly from left to right, which shows it starts to charge, at the same time LED indicator light displays the electric quantity.
*Take out retractable cable, connect Mini USB taken from box with output port of retractable cable.
*Connect Mini USB with input socket of the product, connect another end of the USB (with input port of adapter USB), then connect the adapter to the power,

as follows:

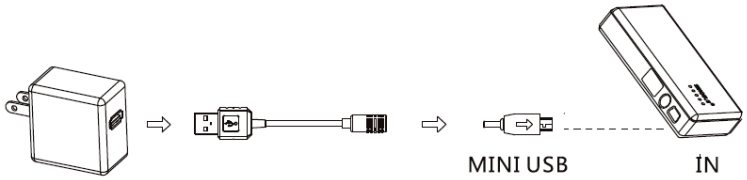

*Blue LED shines regularly from left to right, which shows it starts to charge, at the same time LED indicator light displays the electric quantity.

2.How to charge your phone, as follows:

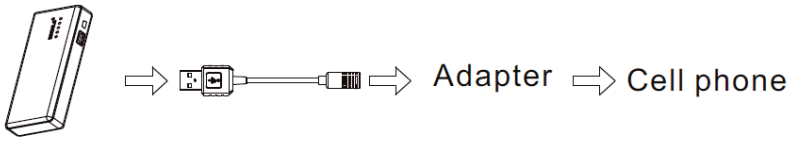

*Take out one adapter suitable for your phone, connect with output port of the retractable cable, then connect adapter with your phone charger port.
*Connect the input port of retractable with the output port of PowerBank.
Tips: keep steady when charging, in case of poor charging function caused by poor contact.

Certification

CE、 RoHS

Maintenance

The following suggestions will extend your using.
* Please keep the device in dry place. Rainwater, moisture, various liquids may damage electronic components and circuit boards.
* Please do not store the device in hot areas. High temperatures can shorten the life of electronic devices and make certain plastics become old.
* Do not drop, knock or shake the device. Rough handling can break internal circuit boards and fine mechanics.
* Please do not open the device privately.

Service

1. One year guarantee after purchase.
2. During the period, products with impersonal defects be sent to sales outlets for maintenance.
3. When the guarantee expired, the maintenance need to be charged.

Note

The following are excluded from warranty

1. Not on the list of warranty terms. No warranty card. No invoice.
2. Damage from unusual factors or inappropriate use, including liquor penetration, scuff, collision, improper storage, rodent pest, etc.
3. Normal wear and tear (wear and tear of shell, normal consumption of battery, etc.)
4. Maintenance, dismantle, change and addition by unauthorized individual or group.
5. Collocation and gift promised by dealer are in the charge of dealers.
6. Breakdown or damage by natural disasters (earthquake, fire, flood, typhoon, thunderstruck, etc.)